




"DE CROMVOIRTSE"
STAAL SERVICECENTER

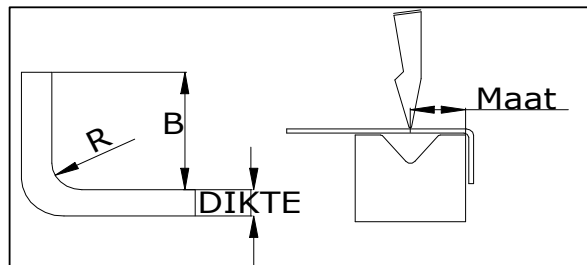

Maximale Kantlengte in meters

STAAL 37			DIKTE											min. afstand tussen zet lijn & uitsparing	
V	R	B	0,5	1	1,5	2	3	4	5	6	8	10	12		15
8	1,5	5,2	4,0	4,0	4,0										5 mm
12	2,0	6,5		4,0	4,0	4,0									8 mm
16	2,7	10,4			4,0	4,0	4,0								10 mm
24	3,9	15,6				4,0	4,0	4,0							14 mm
30	5,0	20,0					4,0	4,0	3,1	2,2					19 mm
40	7,0	26,0					4,0	4,0	4,0	2,9	1,7				25 mm
60	10,0	39,0							4,0	4,0	2,5	1,6			33 mm
80	13,5	52,0								4,0	3,3	2,1	1,5	0,9	45 mm


kleinste inwendige maat
bij meerdere zettingen

9
9
16
16
20
25
35
48

Maximale Kantlengte in meters

ROESTVASTSTAAL			DIKTE											min. afstand tussen zet lijn & uitsparing	
V	R	B	0,5	1	1,5	2	3	4	5	6	8	10	12		15
8	1,5	5,2	4,0	4,0	4,0										5 mm
12	2,0	6,5		4,0	4,0										8 mm
16	2,7	10,4			4,0	4,0	3,5								10 mm
24	3,9	15,6				4,0	4,0	2,7							14 mm
30	5,0	20,0					4,0	3,4	2,1	1,5					19 mm
40	7,0	26,0					4,0	4,0	2,9	2,0	1,1				25 mm
60	10,0	39,0							4,0	2,9	1,7	1,1			33 mm
80	13,5	52,0								4,0	2,2	1,4	1,0	0,6	45 mm

9
9
16
16
20
25
35
48

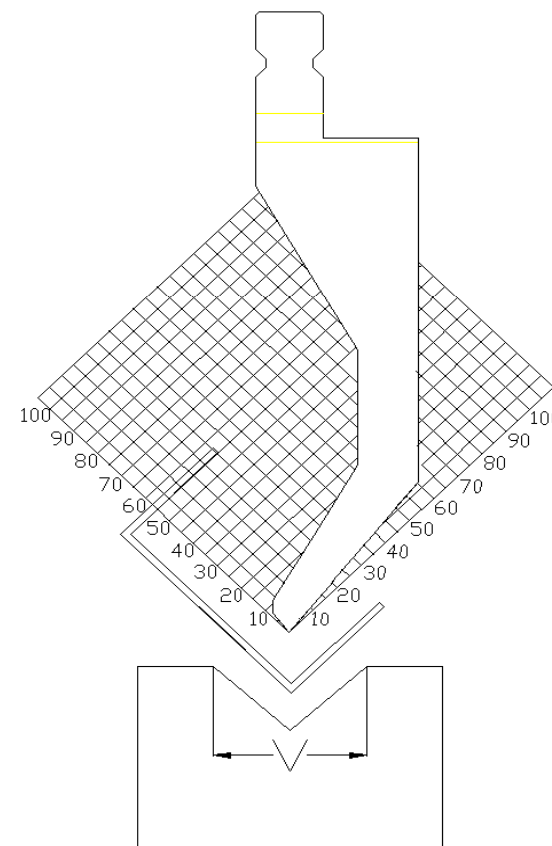

max kantlengte= 4000 mm, tussen de wangen: 3150 mm
V groef = 8 x plaatdikte diepte wang: 400

V	V groef
R	Inwendige radius
B	Binnemaat incl. zetting

Maximaal te zetten U profiel
maximaal te zetten Bakhoogte = 160mm
(max baklengte = 1500)